
Trituratori bi-albero CR

I trituratori bi-albero sono macchine robuste ed affidabili e vengono utilizzati per la riduzione volumetrica di qualsiasi tipologia di materiale. Caratteristica di questo macchinario a lame controrotanti con basse velocità di rotazione è la capacità di applicare alte coppie grazie ai riduttori opportunamente dimensionati. Lo spessore delle lame, la forma dei becchi e la configurazione di potenza installata possono variare a seconda dell'applicazione richiesta. In caso si debbano processare rifiuti ingombranti può essere fornito un meccanismo spintore utile a forzare il materiale nella camera di macinazione.
La configurazione del trituratore primario consente più cicli di riaffilatura delle lame prima della sostituzione, garantendo una lunga durata dei componenti e minori costi di manutenzione, anche con lame parzialmente usurate.

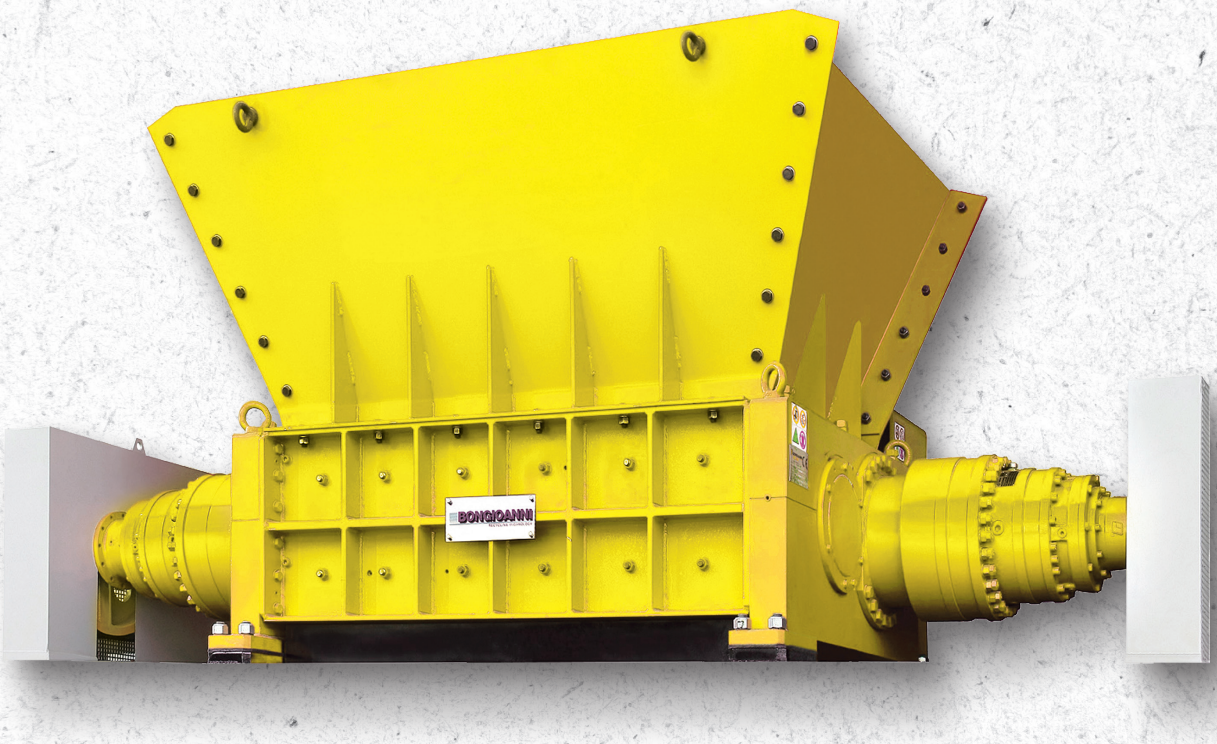

Dati tecnici CR

Tipo	Potenza motori (kW)	Zona di lavoro	Spessore dischi (mm)	Numero alberi	Peso (kg)
CR1309	2X37	1300X900	50/100	2	5300
CR1210	2x55	1200x1000	50/100	2	7000
CR1510	2X75	1500X1000	50/100	2	8000
CR1814	2X132 / 2X160	1800X1400	50/100	2	20000


Trituratori bi-albero CR - Ottobre 2025
Nell'ottica del miglioramento, BONGIOANNI MACCHINE Spa si riserva di modificare in qualsiasi momento, senza obbligo di preavviso, le caratteristiche dei prodotti.
BONGIOANNI MACCHINE Spa non si assume responsabilità per eventuali errori o inesattezze contenute in questo catalogo, che non può essere considerato come contratto nei confronti di terzi.

Bongioanni Macchine Spa - Fossano (CN) - Italy
recycling@bongioannimacchine.com
www.bongioannimacchine.com

BONGIOANNI
RECYCLING TECHNOLOGY

Double-shaft shredders CR

The double-shaft shredders are very reliable and solid machines that are used for the volumetric reduction of any type of material. The main characteristic of this machine with counter-rotating blades at low rotational speeds, is its ability to apply high torques thanks to properly dimensioned gearboxes.
The thickness of the blades, the shape of the teeth and the configuration of the installed power can vary depending on the required application.
A pushing device suitable to force the material inside the grinding chamber can be provided, in case bulky wastes need to be processed.
The design of the primary shredder allows for **multiple blade resharpening cycles** before full replacement, ensuring **longer component life** and **lower maintenance costs**, even when operating with partially worn blades.

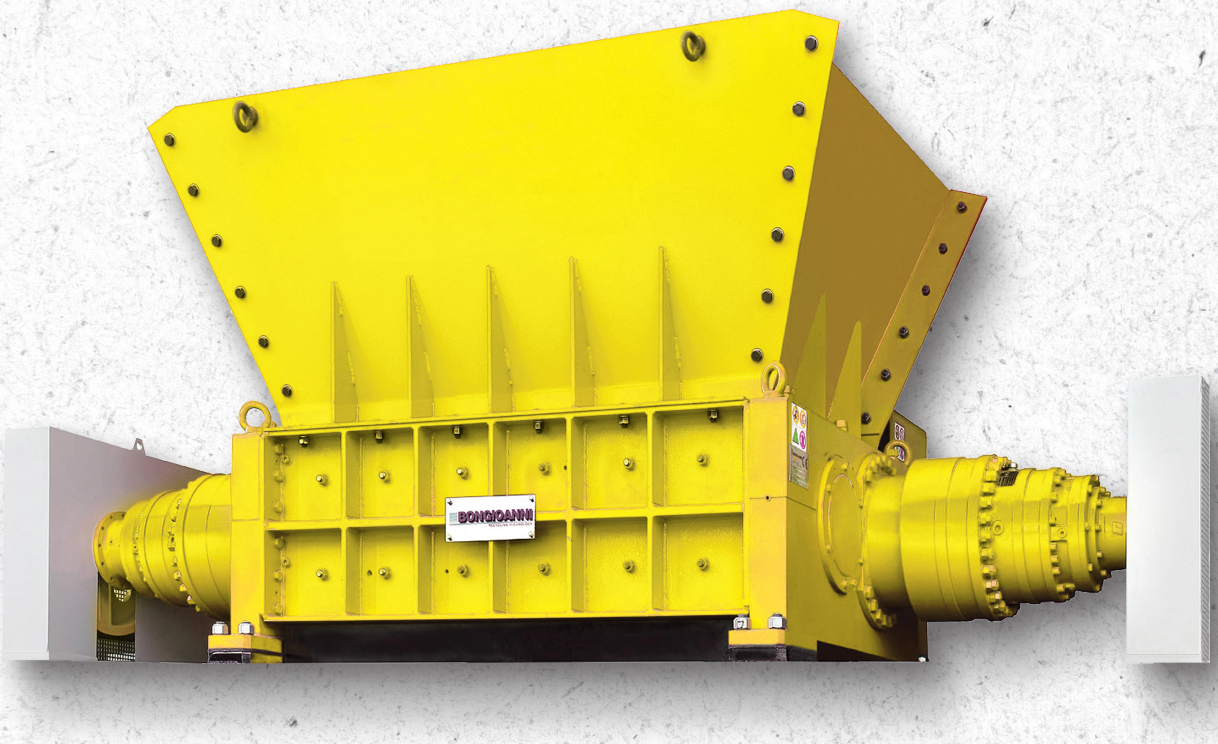

Technical data CR

Type	Power installed (kW)	Work zone	Discs Thickness (mm)	Number shafts	Weight (kg)
CR1309	2X37	1300X900	50/100	2	5300
CR1210	2x55	1200x1000	50/100	2	7000
CR1510	2X75	1500X1000	50/100	2	8000
CR1814	2X132 / 2X160	1800X1400	50/100	2	20000

Double-shaft shredders CR – October 2025
With a view to improvement, BONGIOANNI MACCHINE Spa reserves the right to modify product characteristics at any time, without prior notice.
BONGIOANNI MACCHINE Spa accepts no liability for any errors or inaccuracies contained in this catalogue, which cannot be considered as a binding contract between third parties.

Bongioanni Macchine Spa - Fossano (CN) - Italy
recycling@bongioannimacchine.com
www.bongioannimacchine.com

BONGIOANNI
RECYCLING TECHNOLOGY